





HOOK & LOOP

COLOR CARD — 04 —

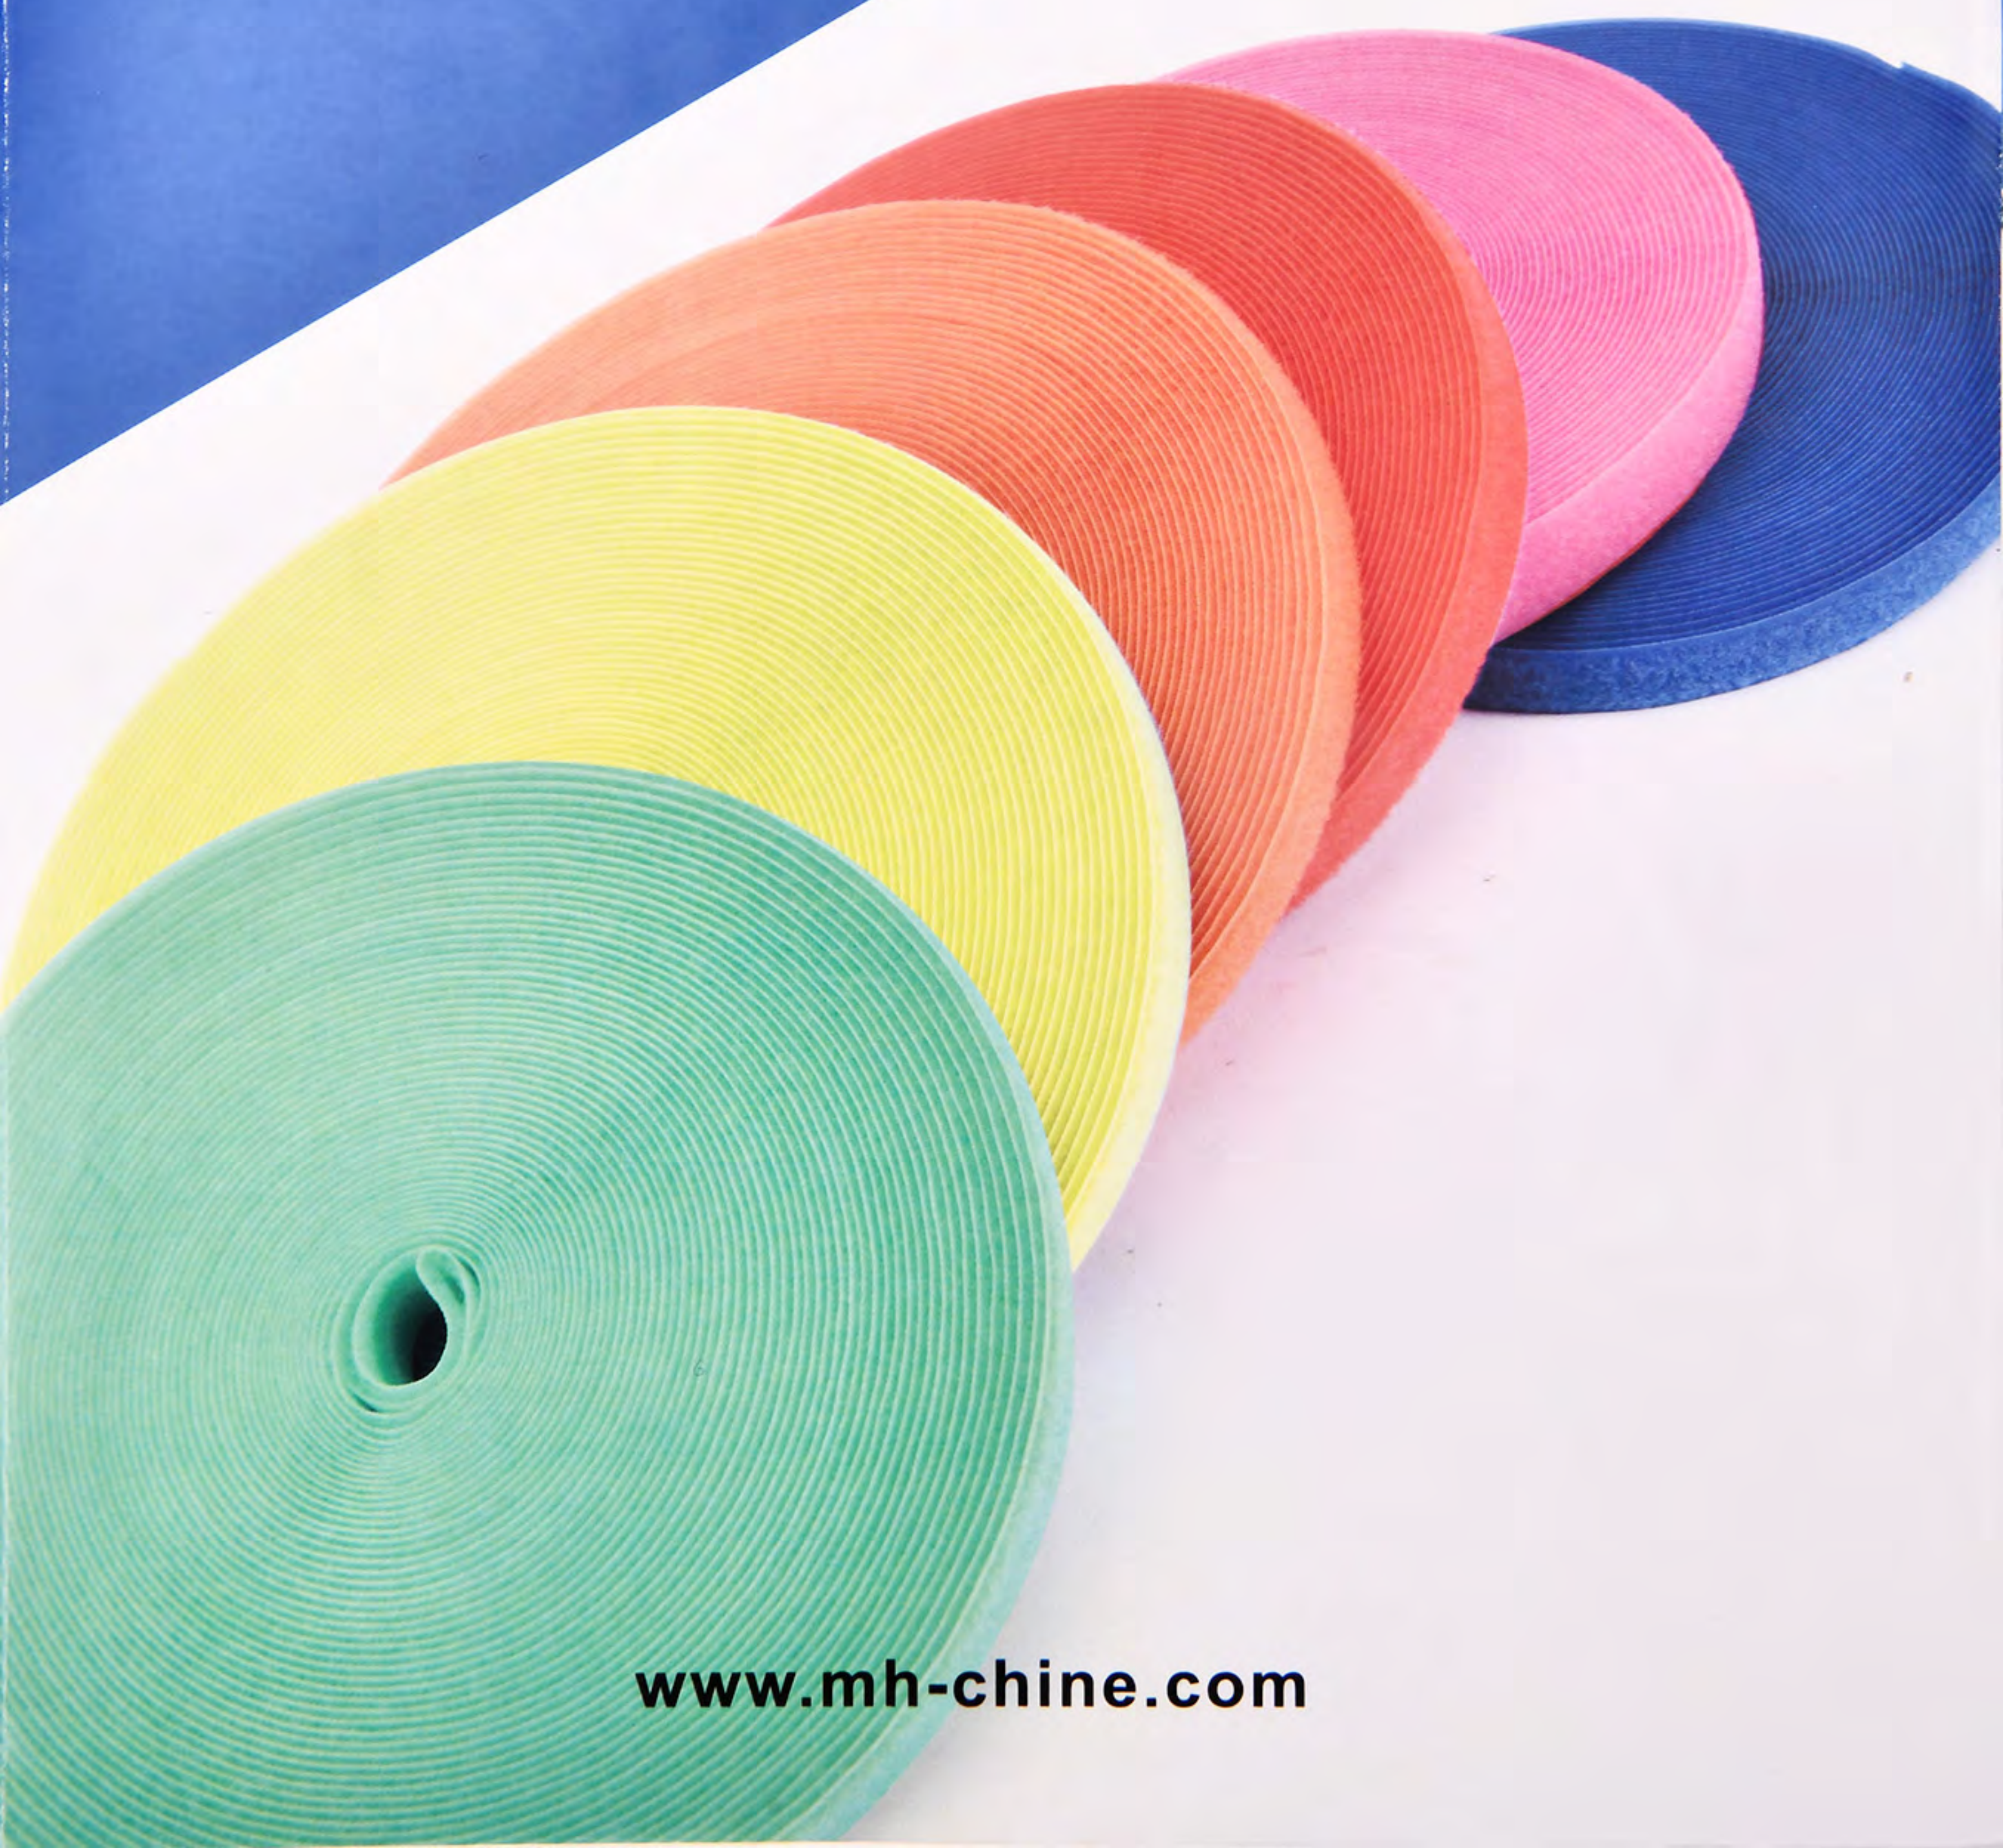

www.mh-chine.com

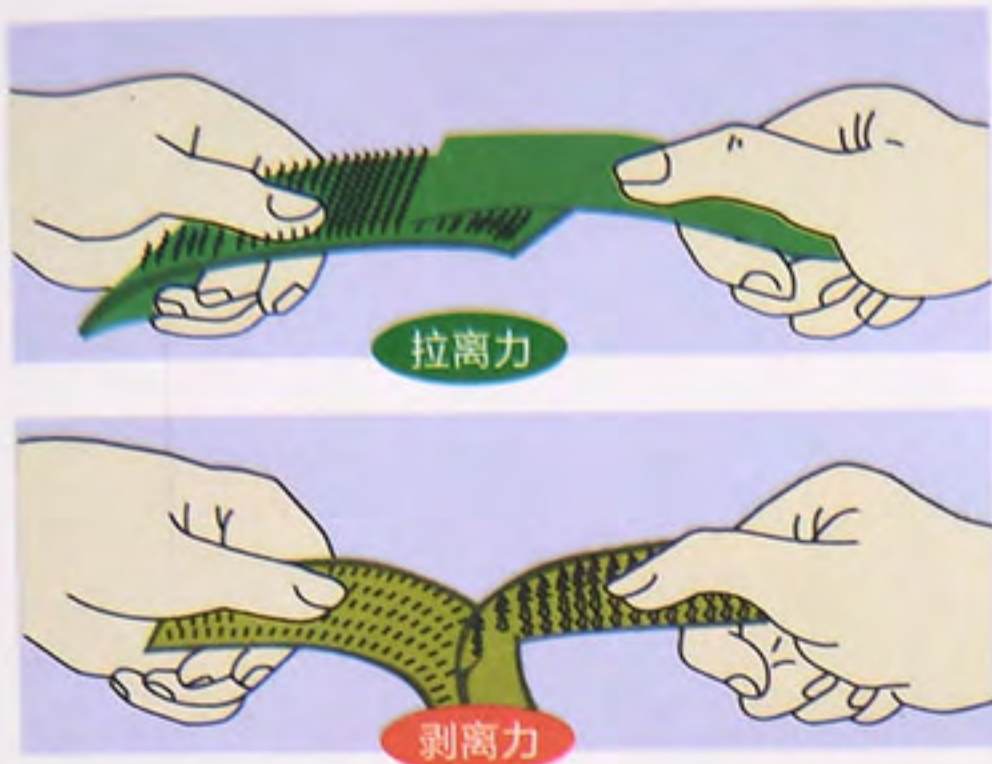


适用范围：

服装、鞋帽、皮具、家具、帐篷、医疗器械、健身器械、劳保用品、军工产品等。

技术指标：

- 1、耐热性，软化点180℃，熔触点215℃；
- 2、耐寒性，在零下35℃，温度愈低，扣合力愈强；
- 3、耐用性，剥离次数2000次，拉力不低于85%；
- 4、平均拉力测试值：7.84N/cm²。

MH6001		MH6013		MH6025	
MH6002		MH6014		MH6026	
MH6003		MH6015		MH6027	
MH6004		MH6016		MH6028	
MH6005		MH6017		MH6029	
MH6006		MH6018		MH6030	
MH6007		MH6019		MH6031	
MH6008		MH6020		MH6032	
MH6009		MH6021		MH6033	
MH6010		MH6022		MH6034	
MH6011		MH6023		MH6035	
MH6012		MH6024			

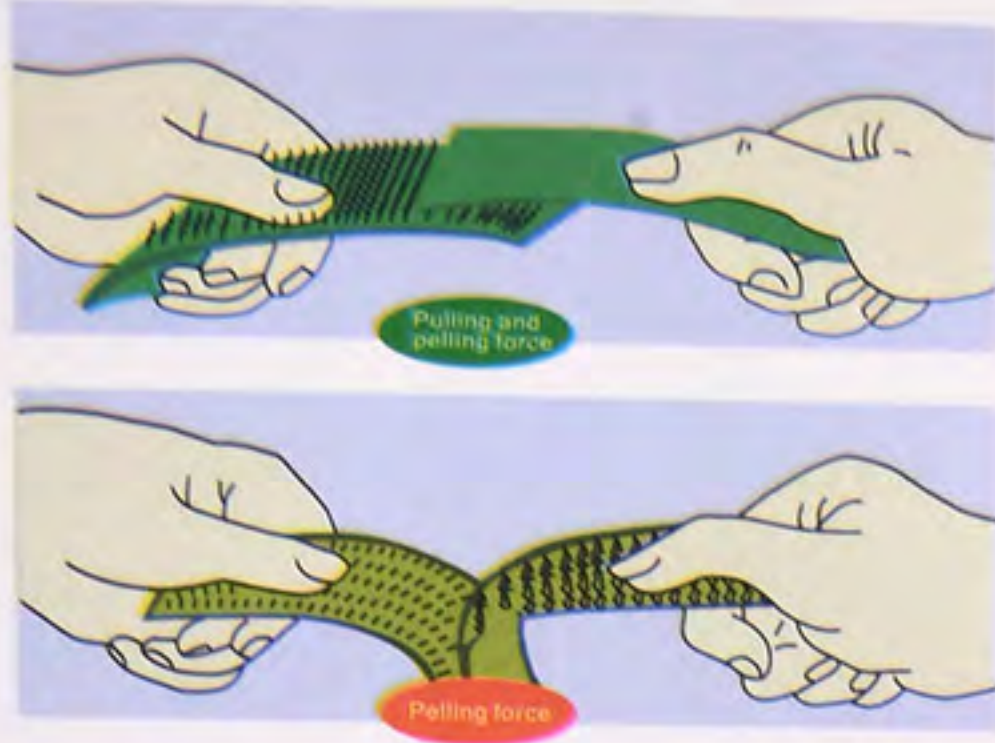

Suitable for

garment, shoe and cap, leather goods, furniture, tent, medical and body-buiding apparatus and instruments and appliances for labour protection, military products, etc.

Technical Index

1. Heat resistance: Softening point: 180°C, Fusing point: 215°C.
2. Cold resistance: The lower the temperature is, the stronger the binding force is at -35°C.
3. Durability: Peel test of 2000 times, tension ≥ 85%.
4. Average tension test value: 7.84N/cm².

MH6036		MH6048		MH6060	
MH6037		MH6049		MH6061	
MH6038		MH6050		MH6062	
MH6039		MH6051		MH6063	
MH6040		MH6052		MH6064	
MH6041		MH6053		MH6065	
MH6042		MH6054		MH6066	
MH6043		MH6055		MH6067	
MH6044		MH6056		MH6068	
MH6045		MH6057		MH6069	
MH6046		MH6058		MH6070	
MH6047		MH6059			




适用范围：

服装、鞋帽、皮具、家具、帐篷、医疗器械、健身器械、劳保用品、军工产品等。

技术指标：

- 1、耐热性，软化点180℃，熔触点215℃；
- 2、耐寒性，在零下35℃，温度愈低，扣合力愈强；
- 3、耐用性，剥离次数2000次，拉力不低于85%；
- 4、平均拉力测试值：7.84N/cm²。

MH6071		MH6083		MH6095	
MH6072		MH6084		MH6096	
MH6073		MH6085		MH6097	
MH6074		MH6086		MH6098	
MH6075		MH6087		MH6099	
MH6076		MH6088		MH6100	
MH6077		MH6089		MH6101	
MH6078		MH6090		MH6102	
MH6079		MH6097		MH6103	
MH6080		MH6092		MH6104	
MH6081		MH6093		MH6105	
MH6082		MH6094			

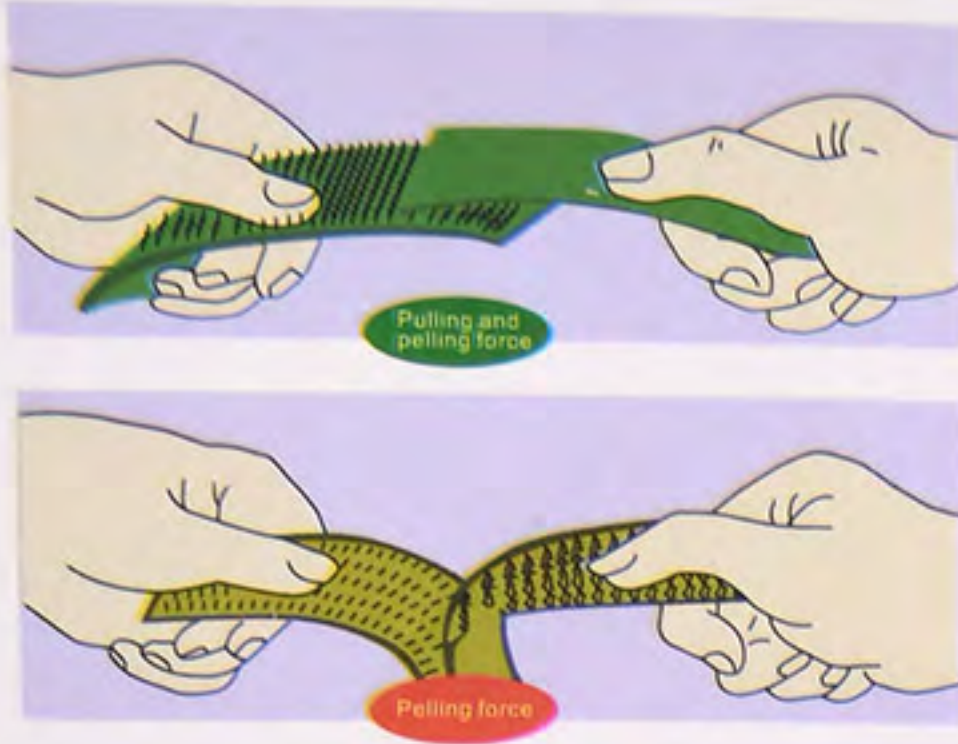


Suitable for

garment, shoe and cap, leather goods, furniture, tent, medical and body-buiding apparatus and instruments and appliances for labour protection, military products, etc.

Technical Index


1. Heat resistance: Softening point: 180°C, Fusing point: 215°C.
2. Cold resistance: The lower the temperature is, the stronger the binding force is at -35°C.
3. Durability: Peel test of 2000 times, tension ≥ 85%.
4. Average tension test value: 7.84N/cm².

MH6106		MH6118		MH6130	
MH6107		MH6119		MH6131	
MH6108		MH6120		MH6132	
MH6109		MH6121		MH6133	
MH6110		MH6122		MH6134	
MH6111		MH6123		MH6135	
MH6112		MH6124		MH6136	
MH6113		MH6125		MH6137	
MH6114		MH6126		MH6138	
MH6115		MH6127		MH6139	
MH6116		MH6128		MH6140	
MH6117		MH6129			

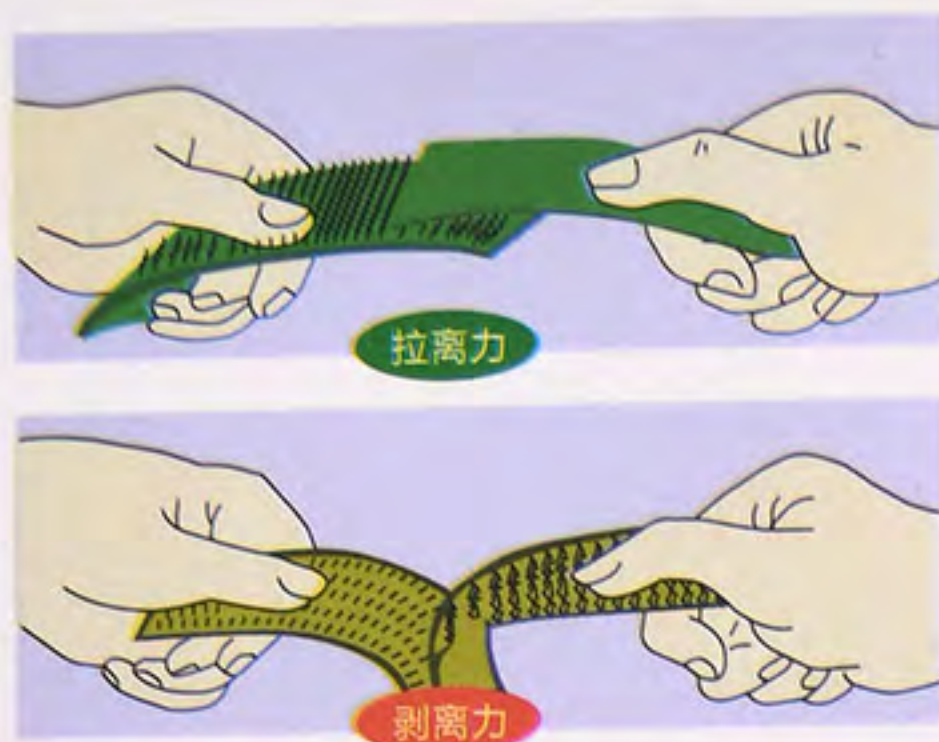

适用范围：	服装、鞋帽、皮具、家具、帐篷、医疗器械、健身器械、劳保用品、军工产品等。
技术指标：	1、耐热性，软化点180℃，熔触点215℃； 2、耐寒性，在零下35℃，温度愈低，扣合力愈强； 3、耐用性，剥离次数2000次，拉力不低于85%； 4、平均拉力测试值：7.84N/cm ² 。

MH6141		MH6153		MH6165	
MH6142		MH6154		MH6166	
MH6143		MH6155		MH6167	
MH6144		MH6156		MH6168	
MH6145		MH6157		MH6169	
MH6146		MH6158		MH6170	
MH6147		MH6159		MH6171	
MH6148		MH6160		MH6172	
MH6149		MH6161		MH6173	
MH6150		MH6162		MH6174	
MH6151		MH6163		MH6175	
MH6152		MH6164			

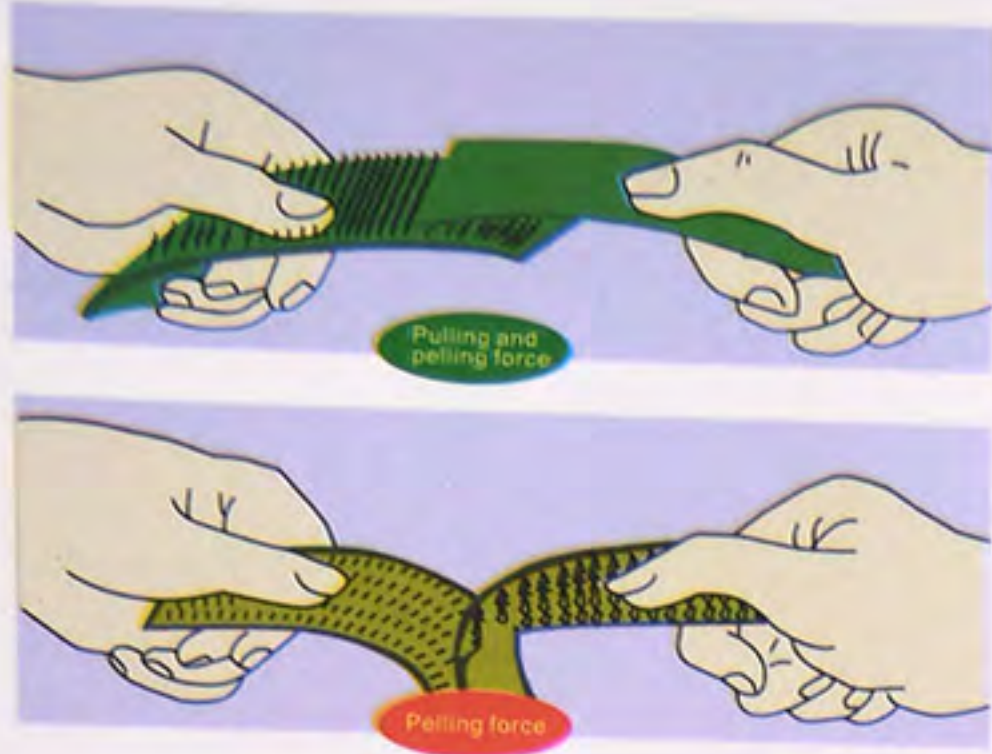


Suitable for

garment, shoe and cap, leather goods, furniture, tent, medical and body-buiding apparatus and instruments and appliances for labour protection, military products, etc.

Technical Index

1. Heat resistance: Softening point: 180°C, Fusing point: 215°C.
2. Cold resistance: The lower the temperature is, the stronger the binding force is at -35°C.
3. Durability: Peel test of 2000 times, tension ≥ 85%.
4. Average tension test value: 7.84N/cm².

MH6176		MH6188		MH6200	
MH6177		MH6189		MH6201	
MH6178		MH6190		MH6202	
MH6179		MH6191		MH6203	
MH6180		MH6192		MH6204	
MH6181		MH6193		MH6205	
MH6182		MH6194		MH6206	
MH6183		MH6195		MH6207	
MH6184		MH6196		MH6208	
MH6185		MH6197		MH6209	
MH6186		MH6198		MH6210	
MH6187		MH6199			

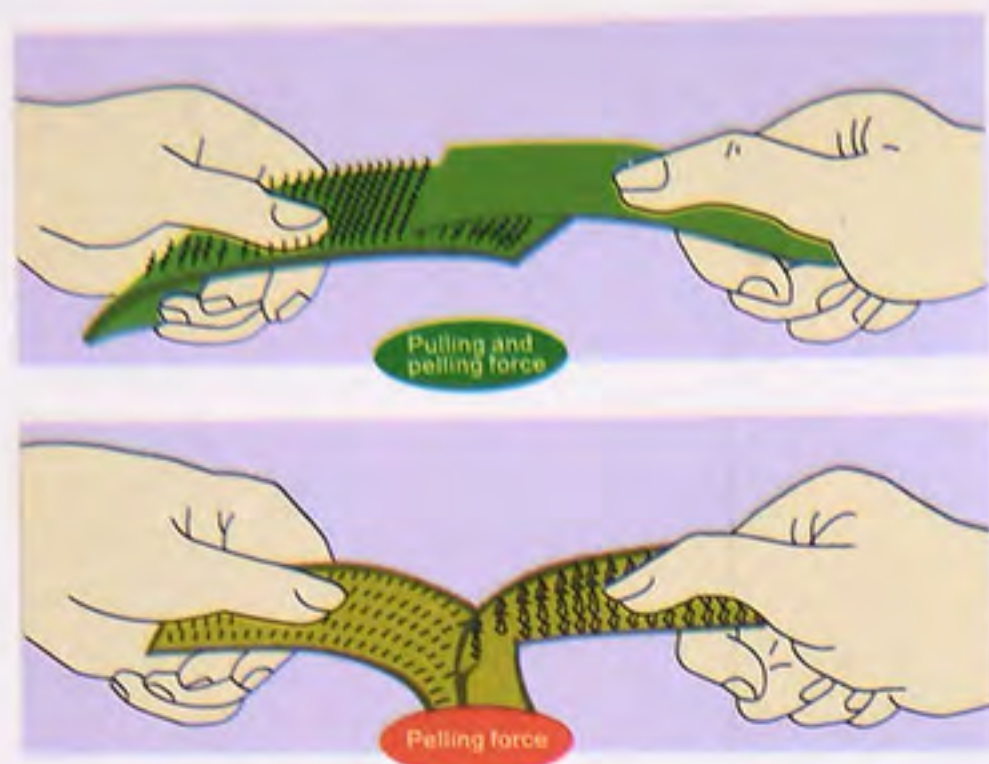

Suitable for

garment, shoe and cap, leather goods, furniture, tent, medical and body-buiding apparatus and instruments and appliances for labour protection, military products, etc.

Technical Index

1. Heat resistance: Softening point: 180°C, Fusing point: 215°C.
2. Cold resistance: The lower the temperature is, the stronger the binding force is at -35°C.
3. Durability: Peel test of 2000 times, tension ≥ 85%.
4. Average tension test value: 7.84N/cm².

MH6211		MH6223		MH6235	
MH6212		MH6224		MH6236	
MH6213		MH6225		MH6237	
MH6214		MH6226		MH6238	
MH6215		MH6227		MH6239	
MH6216		MH6228		MH6240	
MH6217		MH6229		MH6241	
MH6218		MH6230		MH6242	
MH6219		MH6231		MH6243	
MH6220		MH6232		MH6244	
MH6221		MH6233		MH6245	
MH6222		MH6234			



适用于服装、鞋帽、皮具用品、家具医疗、健身器械、劳保用品等

Suitable for use in garment ,shoe and cap ,leather goods,furniture ,medical and body-building apparatus and instruments and appliances for labour protection ,etc.